



TWO ZONE INDUCTION BOILING TOP



Induction Boiling Top

KEY FEATURES

- 2 x 3.5kW or 2 x 5kW models available
 - choose the ideal model for your outlet
- 270mm diameter energy efficient heat zones
 - instant on, fast heat up, reduced energy usage
- Heavy duty, ceramic glass hob plate
 - spillages can simply be wiped away
- Variable control settings
 - fast, controllable cooking
- In-built pan detection
 - no pan = no wasted energy
- Low heat emissions
 - contributes to a cooler kitchen
- Laser-etched control icons
 - permanent, indelible markings

MODELS and ACCESSORIES

E3901i - Two zone induction boiling top (2 x 3.5kW)

E3902i - Two zone induction boiling top (2 x 5kW)

- Fully integrated extended flue
- Stand
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR PLUS

TWO ZONE INDUCTION BOILING TOP

MODEL DIMENSIONS (in mm)

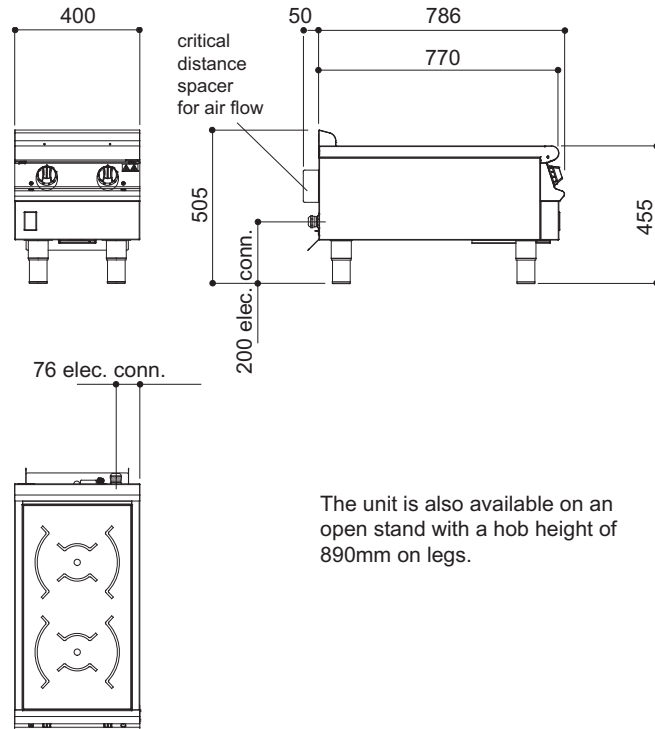

The unit is also available on an open stand with a hob height of 890mm on legs.

SPECIFICATION DETAILS

	E3901i	E3902i
Electrical rating (kW)	7	10
Electrical supply voltage	400V 3~	400V 3~
Required electrical supply (amps)	32	32
Electrical current split (amps)	L1: 10.7 / L2: 10.7 / L3: 10.7	L1: 15.3 / L2: 15.3 / L3: 15.3
Zone rating (kW)	2 x 3.5	2 x 5
Weight (kg)	42	42
Packed weight (kg)	50	50