

CHIEFTAIN GRILL

E2522



DESCRIPTION

High performance, electric grill designed to cope with constant throughput in the busiest kitchens.

Stainless exterior and interior linings are designed to be easily cleaned. A removable drip tray is supplied to catch cooking debris with an additional tray supplied to be hung upon the toast rack.

Two heat zones offer cooking versatility and reduced energy consumption. Supplied with reversible cast aluminium brander and support grid.

FEATURES and BENEFITS

- Twin, high power elements
 - use either half or entire grilling compartment
- Five position shelf runners
 - ideal for flexibility of food items being prepared
- Reversible, close-ribbed brander
 - simply turn and use during busy serving periods
- Removable drip tray
 - catches fats, juices and debris for easy cleaning

OPTIONAL ACCESSORIES

- Bench legs
- Wall bracket
- Brander
- Toast grid
- Floor stand

VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172. For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning

SITING

Grill must be installed level, in a well lit position. A clearance of 200mm from any wall or object liable to damage from overheating is required. 75mm clearance from any wall is required to allow removal of side panels for maintenance. If unit is to be situated within close proximity to a wall, partition, kitchen furniture or decorative finish, etc. it is recommended these be constructed of a non-combustible material. If this is not possible, such surfaces require to be clad in a non-combustible, heat insulating material.






CHIEFTAIN GRILL

E2522

MODEL DIMENSIONS (in mm)

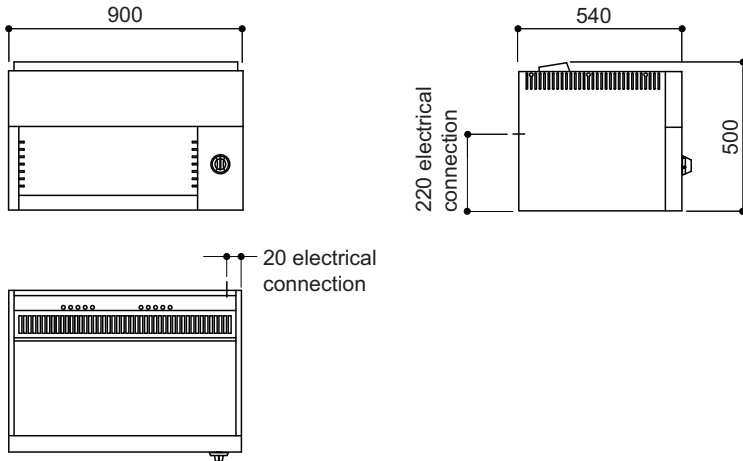

SPECIFICATION DETAILS

E2522

Electrical rating (kW)	7kW
Electrical supply voltage	230 - 240V N~ or 400 - 415V 2N~
Amps per phase (A)	L1 - 15.2, L2 - 15.2
Weight (kg)	77
Packed weight (kg)	82

