

# Seal Food Merchandiser (650 Refrigerated – Under counter)

## Key Features

- Type: Refrigerated counter-top unit
- Built-in refrigeration module
- Extruded aluminium curved frame
- R404a refrigerant
- Thermostatic temperature control with digital display
- Cabinet temperature 3°-5°C
- Fan cooled condenser
- Automatic defrost and condensate water evaporation
- Blown air circulation
- Diffused internal light
- Adjustable shelf positions
- Supplied with two chrome plated shelves
- Meets the performance requirements of BS EN ISO 23953-2:2005 Climate Class 3M2



C6R/125BU

## Construction

- Body: powder coated aluminium frame (silver)
- Internal components: stainless steel grade 430
- Glazing: toughened safety glass, single and double glazed
- Door: sliding rear doors
- Base plinth: black plastic coated steel
- Shelves: chrome plated

## Available Options


- Choice of three widths
- Choice of self service or back service
- 60Hz supply (price on request)

## Available Accessories

N/A

## Specifications

Model	C6R/75BU	C6R/75SU	C6R/100BU	C6R/100SU	C6R/125BU	C6R/125SU
External height (mm)	755					
External width (mm)	750		1000		1250	
External depth (mm)	650					
Capacity net volume (litres)	213		292		371	
Back or self-service	Back	Self-Service	Back	Self-Service	Back	Self-Service
Number of shelves (including base)	3					
Dimension of refrigeration module H x W x D (mm)	265 x 550 x 325					
Shelf dimensions W x D (mm)	650 x 525		900 x 525		1150 x 525	
Cabinet temperature (°C)	3°C -5°C					
Food holding temperature(°C)	-1°C -7°C					
Maximum ambient temperature (°C)	25°C					
Maximum ambient relative humidity (%)	60%					
Total power rating kW	0.500		0.675		0.675	
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	2.4		4		4	
Net weight unpacked (kg)	89		117		138	
Gross weight packed (kg)	127		155		178	
Shipping volume (m <sup>3</sup> )	0.789		1.022		1.211	

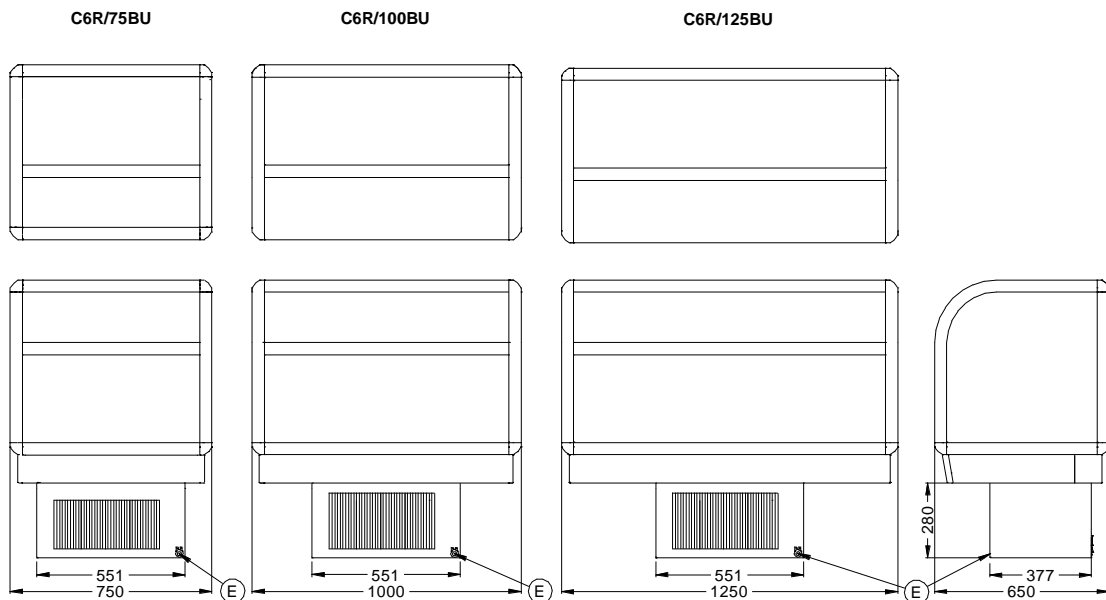

Lincat Limited, Whisby Road,  
Lincoln LN6 3QZ,  
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555  
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530  
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:  
SEALC6R75BU\_C6R75SU\_C6R100BU\_C6R100SU\_C6R125BU\_C6R125SU  
Issue date: Feb-17