

Seal Food Preparation Bars

Key Features

- Type: Refrigerated counter-top unit
- Side mounted refrigeration module (left side)
- R134a refrigerant
- Thermostatic temperature control with digital display
- Well temperature -1° to $+2^{\circ}\text{C}$
- Fan cooled condensor
- Nitrile rubber feet
- GN capacity 1/3 x 150mm
- Meets the performance requirements of BS EN ISO 23953-2:2005 Climate Class 3M2



FPR5 with PRC5

Construction

- Body: stainless steel 430 grade
- Internal: stainless steel 304 grade
- Glazing: toughened safety glass (see accessories)

Available Options


- Choice of two widths

Available Accessories

- Back service glass
- Stainless steel lid
- Wall brackets

Specifications

Model	FPB5	FPB7
External height (mm)	262	262
External width (mm)	1225	1580
External depth (mm)	376	376
Well temperature (°C)	-1 °C – 2 °C	
Food holding temperature(°C)	-1 °C – 7 °C	
Maximum ambient temperature (°C)	25 °C	
Maximum ambient relative humidity (%)	60%	
Total power rating kW	0.175	
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	0.7	
Net weight unpacked (kg)	25	29
Gross weight packed (kg)	30	34
Shipping volume (m ³)	0.280	0.348

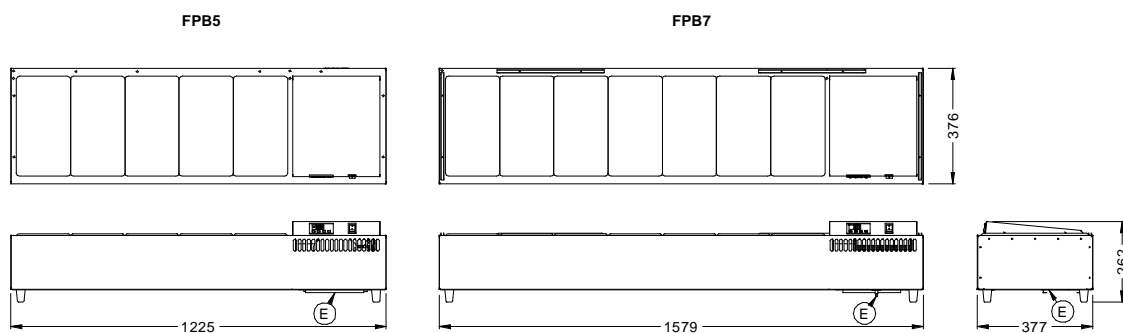

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
SEALFPB
Issue date: Feb - 17