

Silverlink 600 Griddles

Key Features

- Type: Electric
- Counter-top unit
- Half ribbed or fully ribbed cooking surface
- Thermostatic temperature control (twin zone models independently controlled)
- Integral splashguard
- Nitrile rubber feet



GS6/TR

Construction

- Body: stainless steel grade 430
- Griddle plate: 12mm thick
- Integral splashguard : 2mm thick stainless steel grade 430

Available Options


- Choice of widths and power ratings
- Half ribbed and fully ribbed models

Available Accessories

- SB6 – Splash guard extension
- SB7 – Splash guard extension
- Various pedestals and stands

Specifications

Model	GS6/TR	GS6/TFR	GS7/R
External height (mm)	330	330	330
External width (mm)	600	600	750
External depth (mm)	611	611	611
Cooking area w x d (mm)	562 x 405	562 x 405	712 x 405
Cooking zones	2	2	2
Net weight unpacked (kg)	38.45	38.45	45.7
Gross weight packed (kg)	50	50	60
Shipping volume (m ³)	0.27	0.27	0.324
Total electrical power rating (kW)	4	4	6.0
Electrical supply 1N~+E 230V 50-60Hz Current rating (A)	18.0	18.0	26.0
Electrical supply 3N~+E 400V 50-60Hz Current Rating (A)	L1-9.0 L2-9.0 L3-N/A	L1-9.0 L2-9.0 L3-N/A	L1-13.0 L2-13.0 L3-N/A

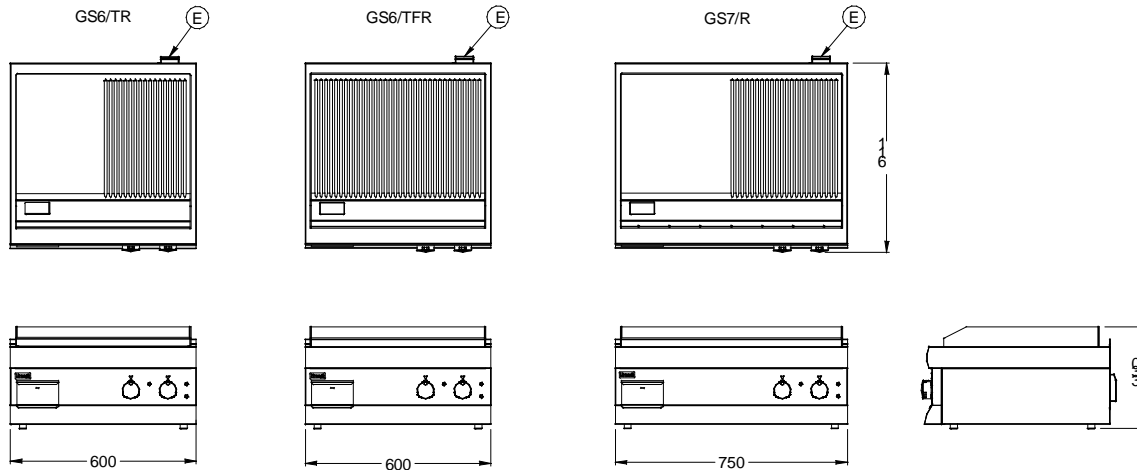

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
SLINKELECGS6TR_GS6TFR_GS6TRE_GS7
Issue date: Feb-17