

Silverlink 600 Griddles

Key Features

- Type: Gas
- Counter top unit
- Fully welded plate (12mm thick)
- Twin zone models independently controlled
- Piezo ignition (millivolt system)
- Flame failure device
- Nitrile rubber feet



GS7/R

Construction

- Body: stainless steel grade 430
- Griddle plate: 12mm thick

Available Options


- Natural gas
- Propane gas
- Choice of widths
- Choice of flat machined steel, half ribbed steel or chrome plated cooking surfaces

Available Accessories

- SB4 - Splashback for GS4
- SB7 - Splashback for GS7

Specifications

Model	GS4	GS4C	GS7	GS7C	GS7R
External height (mm)	415	415	415	415	415
External width (mm)	450	450	750	750	750
External depth (mm)	650	650	650	650	650
Net weight unpacked (kg)	33	33	55	55	55
Gross weight packed (kg)	43	43	67	67	67
Shipping volume (m ³)	0.214	0.214	0.439	0.439	0.439
Flat machined steel cooking surface	Yes	No	Yes	No	No
Flat chrome plated cooking surface	No	Yes	No	Yes	No
Half-ribbed steel cooking surface	No	No	No	No	Yes
Griddle plate dimensions (mm) W x D	418 x 409	418 x 409	718 x 409	718 x 409	718 x 409
No. of cooking zones	1	1	2	2	2
Heat input per burner Natural (kW)	2.7	2.7	1.875	1.875	1.875
Heat input per burner Propane (kW)	2.75	2.75	2.0	2.0	2.0
Total heat input Natural (kW)	5.4	5.4	7.5	7.5	7.5
Total heat input Propane (kW)	5.5	5.5	8.0	8.0	8.0
Gas consumption at full rate Natural (m ³ h ⁻¹)	0.51	0.51	0.71	0.71	0.71
Gas consumption at full rate Propane (kg h ⁻¹)	0.39	0.39	0.57	0.57	0.57
Gas inlet	G ½ male				
Btu/h conversion	kW x 3412				

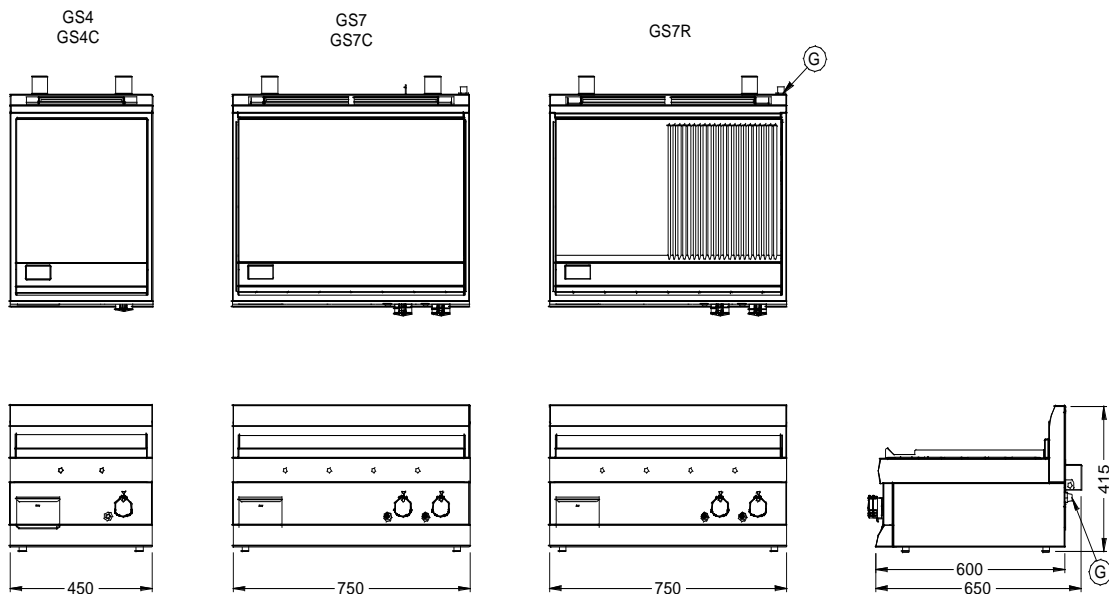

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
 UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
 Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
SLINKGASGS4_GS7
Issue date: Feb-17